BRONZE ANGLE

250 PSI, 1-1/2" - 4"
FLANGED BY HOSE ANGLE, B.B.,
MONEL TRIM

FIGURE NO. NB25427E

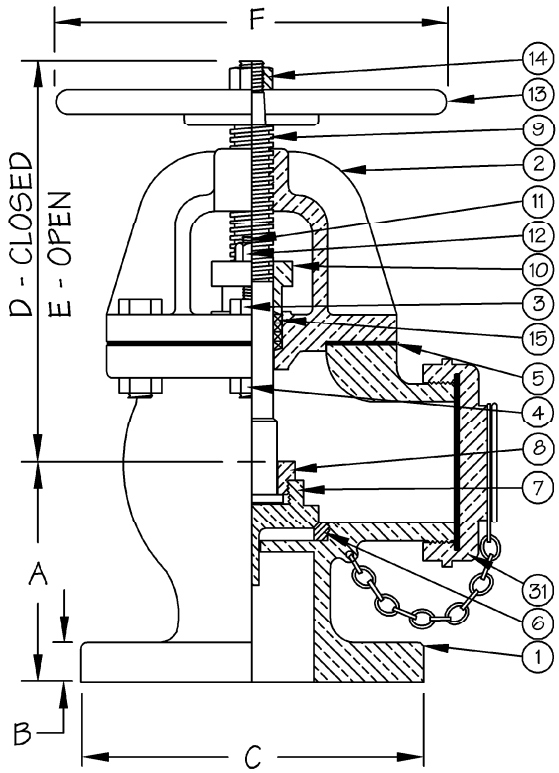

BILL OF MATERIALS			
	PART	MATERIAL	SPEC.
1	BODY	BRONZE	ASTM B61
2	BONNET	BRONZE	ASTM B61
3	BONNET BOLT	NI-CU ALLOY	QQ-N-281, CL. A
4	BONNET NUT	NI-CU ALLOY	QQ-N-281, CL. A or B
5	BONNET GASKET	SYNTHETIC RUBBER	MIL-PRF-1149, CL. 2
6	SEAT RING	NI-CU ALLOY	ASTM A494, GR. M30H
7	DISC	NI-CU ALLOY	ASTM A494, GR. M30C
8	DISC NUT	NI-CU ALLOY	QQ-N-281, COMP. A
9	STEM	NI-CU ALLOY	QQ-N-281, CL. A
10	PACKING GLAND	BRONZE	ASTM B61
11	GLAND STUD	NI-CU ALLOY	QQ-N-281, CL. A
12	GLAND NUT	NI-CU ALLOY	QQ-N-281, CL. A or B
13	HANDWHEEL	ALUMINUM	803-1385620
14	WHEELNUT	SILICON BRONZE	ASTM B98
15	STEM PACKING	SYNTHETIC TEFLON	COMMERCIAL
31	HOSE CAP & CHAIN	BRONZE	ASTM B62

DIMENSIONS

SIZE	1-1/2	2-1/2	3	4
A	$3\frac{1}{2}$	$4\frac{5}{8}$	$4\frac{15}{16}$	$5\frac{3}{4}$
B	$\frac{13}{16}$	$\frac{15}{16}$	$\frac{15}{16}$	1
C	$5\frac{1}{16}$	$6\frac{1}{8}$	$6\frac{5}{8}$	$7\frac{11}{16}$
D	$6\frac{9}{16}$	$8\frac{1}{8}$	$7\frac{7}{8}$	$12\frac{7}{8}$
E	$6\frac{15}{16}$	$8\frac{7}{8}$	$9\frac{1}{16}$	$13\frac{7}{8}$
F	6	8	9	10
WT	19	40	54	83

PIMA VALVE, INC.
2010